

Jatropha production on wastelands in India: opportunities and trade-offs for soil and water management at the watershed scale

Kaushal K. Garg, International Crops Research Institute for the Semi Arid Tropics (ICRISAT), Patancheru, Andhra Pradesh India

Louise Karlberg, Stockholm Environment Institute (SEI), Sweden

Suhas P. Wani, ICRISAT, Patancheru, Andhra Pradesh India

Göran Berndes, Chalmers University of Technology, Göteborg, Sweden

Received December 28, 2010; revised May 16, 2011; accepted May 20, 2011

View online at Wiley Online Library (wileyonlinelibrary.com); DOI: 10.1002/bbb.312;

Biofuels, Bioprod. Bioref. 5:410–430 (2011)

Abstract: Biofuel production from feedstocks grown on wastelands is considered a means of addressing concerns about climate change and improving energy security while at the same time providing an additional source of income for the land users. The establishment of biomass plantations on wastelands is likely to affect local livelihoods and can affect surrounding ecosystems by influencing hydrologic flows and processes such as erosion. We present an assessment of *Jatropha plantation establishment on wastelands*, using the ArcSWAT modeling tool. The assessment was made for a wasteland located in the Velchal watershed, Andhra Pradesh, India, which recently was converted to a biofuel plantation with *Jatropha*. The previous land use, in this case grazing, could continue in the *Jatropha* plantations. Several desirable effects occurred as a result of the land-use conversion: non-productive soil evaporation was reduced as a larger share of the rainfall was channeled to productive plant transpiration and groundwater recharge, and at the same time a more stable (less erosive) runoff resulted in reduced soil erosion and improved downstream water conditions. A win-win situation between improved land productivity and soil carbon content was observed for the *Jatropha* plantations. On the other hand, the results indicate that at the sub-basin scale, reductions in runoff generation as a result of large-scale conversion of wastelands to *Jatropha* cropping may pose problems to downstream water users and ecosystems. From a livelihoods perspective, *Jatropha* production was generally positive,

creating a complementary source of income to the farmers, thus strengthening the resilience of the local community. In the future, the potential gain from *Jatropha* cropping is expected to increase as cropping systems improve and growing biofuel markets result in better conditions for biofuel producers. © 2011 Society of Chemical Industry and John Wiley & Sons, Ltd

Keywords: *Jatropha*; biofuel; India; evapotranspiration; sedimentation; runoff; livelihoods; soil carbon; water balance; wasteland

Introduction

In India, rapid urbanization coupled with industrialization and economic growth drives increasing energy demand and substantial import of crude petroleum oil.¹ Since the beginning of the 1990s, India's oil imports have increased more than five-fold and have considerable influence on the country's foreign exchange expenditures. The Indian economy is expected to continue to grow, resulting in further increase in energy demand and rising oil imports, projected to reach 166 and 622 million tons by 2019 and 2047, respectively.¹ This compares to the 110.85 million tons of crude oil that was imported in 2006/2007.²

As in many other countries, in India biofuels are considered an option for addressing climate change and energy security concerns.^{3–5} A petrol-blending program mandated 5% ethanol blending of petrol, initially for selected states and union territories, and in 2006 extended to the whole country.⁶ Programs for stimulating complementary use of biodiesel to displace petroleum-based diesel primarily focused on biodiesel production based on non-edible oil seeds produced on marginal or degraded lands. The Government of India approved the National Policy on Biofuels in 2009 targeting a 20% blend of biofuels with gasoline and diesel by 2017.⁷

Wastelands in India

The most recent governmental assessment in India classified slightly more than 50 million hectare (ha), or 16% of the Indian land area, as wasteland, including a range of different land types, for example, degraded forest land, gullied, ravenous and bedrock-intruded land, land under shifting cultivation, degraded pasture and grazing land, degraded land under plantations, and mining and industrial land.⁸ Soil degradation processes have severely reduced the soil productivity and it has been estimated that, on average,

wasteland productivity is less than 20% of the original potential.⁹ Contributing causes include water logging, soil salinity/alkalinity, and a combination of low biomass productivity and excessive biomass removals reducing the soil organic carbon content.

A substantial wasteland area consists of degraded lands that are deteriorating due to lack of appropriate soil and water management, or due to natural causes, and which can be brought into more productive use. Roughly 40% of the wasteland area has been estimated as available for forestation¹⁰ and about 14 million ha is considered suitable for cultivating biofuel feedstocks, such as *Jatropha*.¹¹ The National Wastelands Development Board was established in 1986 with the objective of bringing five million ha of wasteland under fuel wood and fodder plantations every year. Establishment of biofuel plantations is considered an option for rehabilitating wastelands, enhancing energy security, and providing employment opportunities and better livelihoods in rural areas.^{4,5,11–14} Considering that about 35% of India's inhabitants live below the poverty line and more than 70% of the poor are small/marginal farmers or landless laborers,¹⁵ it is essential that wasteland development provides these socioeconomic benefits.

Jatropha

Jatropha (*Jatropha curcas* L.), commonly known as 'purg-ing nut' or 'physic nut', is a tropical, perennial deciduous, C3 plant belonging to the family *Euphorbiaceae*.^{16,17} It is adapted to perform best under conditions of warm temperatures and, as with many members of the family *Euphorbiaceae*, contains compounds that are highly toxic. *Jatropha* has its native distributional range in Mexico, Central America and part of South America, but has today a pan-tropical distribution.¹⁸ Productivity of *Jatropha* depends on rainfall, soil moisture availability, soil characteristics including fertility,^{19–22} genetics,^{17,23–24} plant

age,²⁵ and various management factors like pruning, fertilization, and disease control.^{22,23,26–28} Annual yield levels at 2–3 ton dry seeds has been proposed as achievable in semi-arid areas and on wastelands, while 5 tons ha⁻¹ can be obtained with good management on good soils receiving 900–1200 mm average annual rainfall.^{19,25,29} Jongschaap *et al.*,³⁰ reported potential *Jatropha* yields as high as 7.8 tons dry seed ha⁻¹ yr⁻¹. The decorticated seeds yield about 28–40% oil,^{13,17} which can be transesterified and used for producing biodiesel.^{31,32} *Jatropha* has not yet undergone breeding programs with selection and improvement. The productivity varies greatly from plant to plant and environmental factors are reported to have a dominating role over genetics in determining seed size, weight, and oil content.²³

A global assessment of the ecological suitability for *Jatropha* cultivation under present and future climatic conditions indicates that high yields should be attainable in both tropical and hot temperate areas.¹⁸ Climate change is estimated to reduce average global yield levels by about 10%, with higher variation at local scale.^{33–35} Areas in Southern Africa (e.g. Zambia), South America (e.g. Argentina, Paraguay), and the northern part of South and East Asia (e.g. Northern India, Nepal and China) are expected to become more suitable for *Jatropha* cultivation in the future¹⁸ due to expected reduced frequency of frost events and cold days and nights.³⁶

Jatropha is considered to be drought tolerant and possible to cultivate on degraded, sandy, and saline soils with low nutrient content.³⁷ Nitrogen and phosphorous inputs may be required for high yields^{30,38,39} but nutrient recycling through leaf fall reduces the need for fertilizer input.¹¹ It is estimated that three-year-old *Jatropha* plants return about 21 kg N ha⁻¹ back to the soil, although the quantity and nutrient content of the fallen leaves from the *Jatropha* plant vary with plant age and fertilizer application.¹¹ There is still limited knowledge about the actual water requirement of *Jatropha* in different agro-ecological regions. But studies indicate that *Jatropha* can be grown in a broad spectrum of rainfall regimes, from 300 to 3000 mm, either in the fields as a commercial crop or as hedges along the field boundaries to protect other plants from grazing animals and to prevent erosion.^{20,26} Minimum and optimum rainfall to produce

harvestable *Jatropha* fruit is assessed as 500–600 and 1000–1500 mm yr⁻¹ in arid and semi-arid tropics, respectively.^{18,21,26} More information is needed concerning how downstream hydrological processes and sediment transport are affected by large-scale implementation at the meso-scale (10–10 000 km²).

Even so, from the perspective of water, *Jatropha* cultivation to provide feedstock for biodiesel production in India is considered an option for making productive use of wastelands while at least partly avoiding conflicts with downstream environmental flow requirements. It is proposed that additional beneficial effects might arise, such as less erosive storm floods and lower sediment loads in riverine ecosystems, and larger groundwater formation as a result of improved infiltrability. Using wastelands for cultivating *Jatropha* could also help strengthening local livelihoods and income diversification, which is high priority for land development.⁴⁰

Scope and aim of study

This paper reports results from a case study of *Jatropha* cultivation on wastelands in the state of Andhra Pradesh. The purpose of the *Jatropha* cultivation was to develop a model for improving the livelihoods for the poor, through promotion of plantations on common land that are managed by local user groups. The aim of the study was to investigate opportunities and trade-offs of *Jatropha* cultivation on wastelands from a livelihood and environmental perspective, with soil and water as the critical resources. Special emphasis was placed on water, and hydrological assessments were conducted using the ArcSWAT tool to analyze the impacts of three different land-use scenarios: (i) a wasteland state (barren land); (ii) biofuel cropping with *Jatropha*; and (iii) long-term biofuel cropping with *Jatropha* assuming changes in soil carbon content and other soil properties.

Study area and data

The state of Andhra Pradesh is located in the semi-arid tropics of Southern India and has some 4.52 million ha of land that is classified as wasteland. This equals 16.5% of the total geographic area of the state.⁸ Half the wasteland area consists of degraded forests, while the rest is covered

with scrub or forms a barren, rocky landscape. The effects of wasteland conversion to biofuel plantations on water flows and sedimentation losses are assessed for a formerly degraded wasteland belonging to the Velchal village, approximately 50 km outside of the city of Hyderabad, in the Manjeera sub-basin of the Godawari river basin, Andhra Pradesh (Fig. 1). Due to over-grazing by livestock, a large area of the Velchal watershed (17.28°N latitude, 77.52°E longitude, 645 meters AMSL) is classified as wasteland. This wasteland consists of hillock, which is relatively flat (2–3% slope) and with a sparse vegetation cover of some trees and grass, and a valley (10–25% slope) covered with various types of bushes and perennial trees. Soils have been

classified as Vertisols with a very shallow soil depth between 10 and 50 cm and even exposing parent rocks at places as an effect of severe erosion due to over grazing. The water-holding capacity is medium to low, and the soil organic carbon content is between 0.60 and 1.2 %.

Demographic data of the Velchal watershed shows that more than 44% of the laborers in the watershed were classified as 'landless' in 2005. These people were largely dependent on casual agricultural labor work or on construction work. In addition, they often migrated to nearby cities and suburban areas to find work opportunities, where 70% of them were living in slum areas. The rest of the population in the community (56%) are so-called 'marginal farmers',

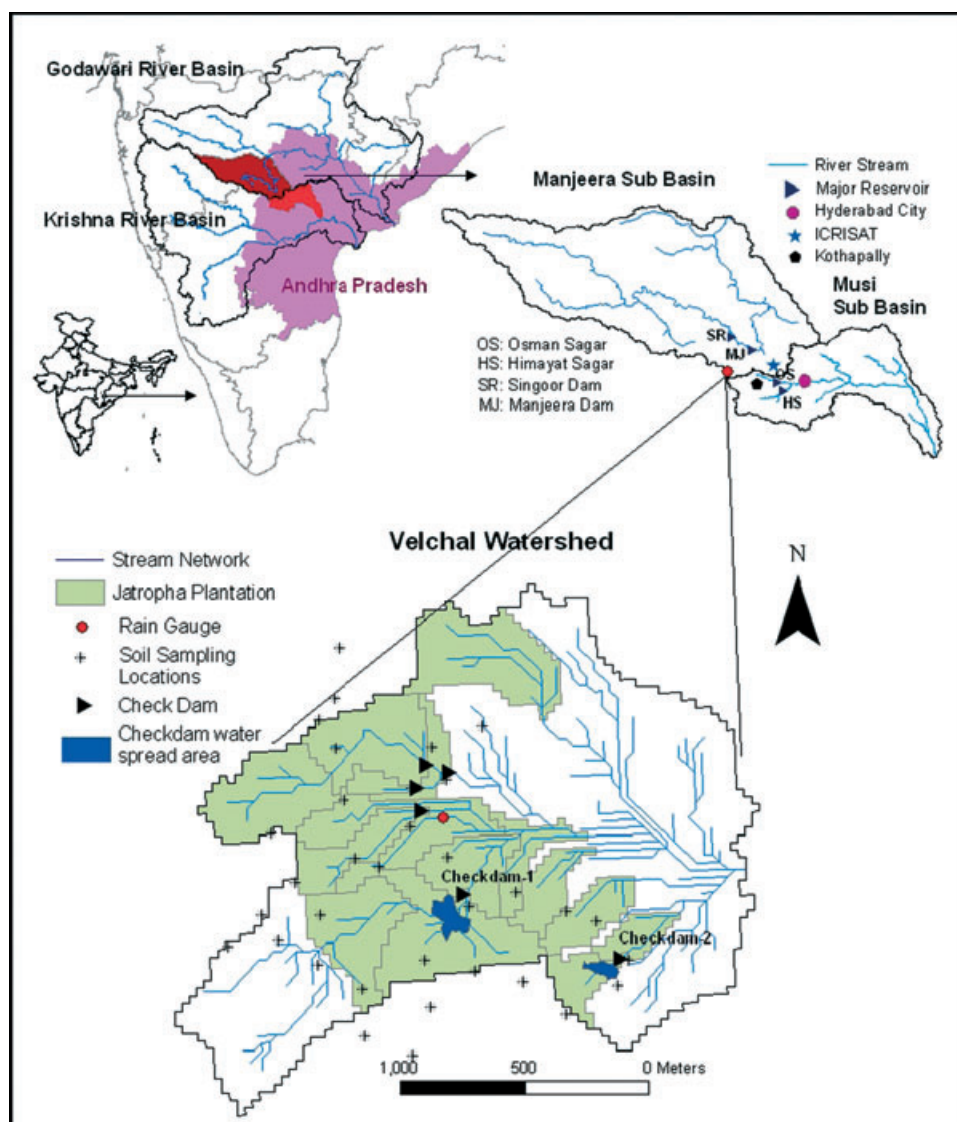


Figure 1. Location of Study area.

cultivating rain-fed crops on land-holdings of less than 2 ha, and also working as intermittent agricultural labourers.^{14,41}

In 2005, the National Oilseeds and Vegetable Oils Development Board of the government of India, together with the ICRISAT consortium, planted *Jatropha* on 160 ha of common property land belonging to the Velchal village which was classified as wasteland. *Jatropha* seedlings approximately 60 cm high were planted at 2 m x 2 m spacing at Velchal watershed. Plants were grown under rain-fed conditions and no irrigation was applied. Soil and water conservation practices (e.g. basins and contour trenches) were implemented to harvest more rainfall. Fertilization (30 kg N ha⁻¹ and 12 kg P₂O₅ ha⁻¹) was applied during the *Jatropha* planting. Further fertilization (50 kg N ha⁻¹ and 57 kg P₂O₅ ha⁻¹) was applied in 2007. The growth parameters and seed yield of *Jatropha* crop were recorded. The plantations were mainly located in the hillock area, although some plantations are also found in the valley.

Before the initiation of the project, landless and marginal farmers were called to a planning meeting along with the village institutional body (known as *Gram Sabha*). The objective of the proposed project, the work protocol, and potential local benefits were discussed. Self-help groups were formed based on the voluntary interest of poor people in need of livelihood opportunities. The group members were trained in various activities, such as nursery raising, planting, harvesting, and oil extraction.

Data on crop characteristics to estimate crop water uptake was collected at the ICRISAT experimental site, a micro-watershed located at the ICRISAT campus in Hyderabad (17.53°N latitude and 78.27°E longitude) where *Jatropha* seedlings (3 m x 2 m spacing) were planted on 4 ha of land in 2004. Since then, *Jatropha* has been cultivated under good management practices, including fertilization (90 kg N and 40 kg P₂O₅ ha⁻¹ year⁻¹) and various agronomic measurements. Seed yield and oil content have been monitored.

The monitored site is characterized by similar climate and rainfall patterns as the degraded wasteland that was planted with *Jatropha* in the Velchal watershed. The topography of the landscape is relatively flat (1–2 % slope). The Vertisol soil that covers the site has low permeability and a soil depth at approximately 1.5–2 meters. Rainfall is highly erratic, both in terms of total amount and distribution over time. The

mean annual rainfall is equal to 860 mm, of which 85 % is distributed between June and October. Pictures in Fig. 2 show *Jatropha* plantation and its fruiting stage at Velchal and ICRISAT watershed during 2010.

Material and methods

Figure 3 shows a conceptual representation of the hydrological cycle at watershed scale. Rainfall is partitioned into various hydrological components as defined by mass balance equation: Rainfall = Out flow from the watershed boundary (Surface runoff + base flow) + Groundwater recharge + Evapotranspiration (Evaporation + Transpiration) + Change in soil moisture storages, where fraction of rainfall stored

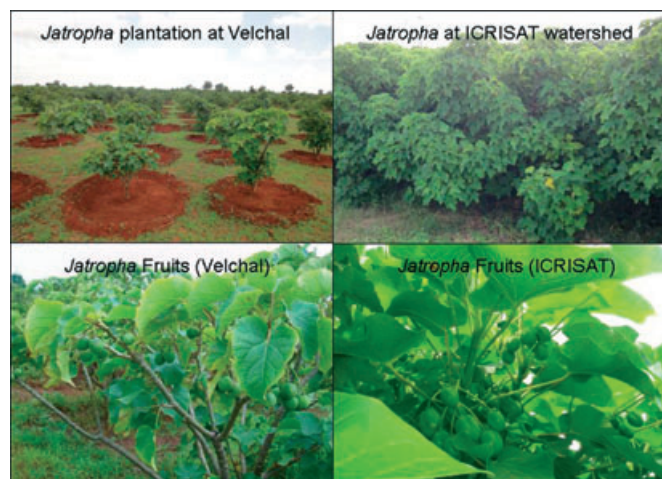


Figure 2. Picture showing *Jatropha* crop and its fruiting stage at Velchal and ICRISAT watershed during year 2010.

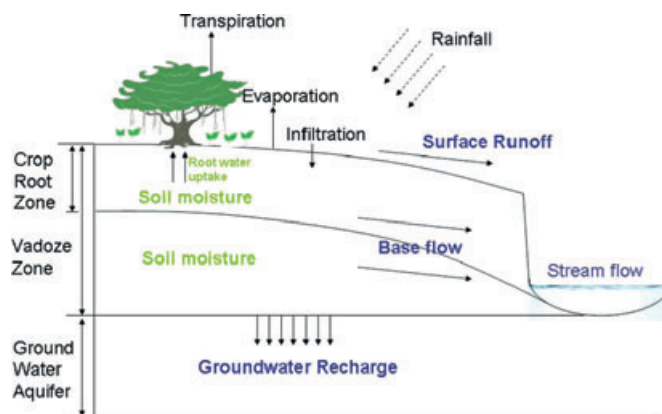


Figure 3. Conceptual representation of hydrological cycle and different hydrological components at watershed scale.

into Vadoze zone is known as green water and water available into groundwater aquifer and amount of water reached at river stream is known as blue water.⁴²

A GIS-based hydrological model, ArcSWAT (the Soil and Water Assessment Tool), was used to assess the hydrological processes and yields for the Velchal watershed, for scenarios with and without biofuel plantations. Since ArcSWAT does not differentiate between transpiration and soil evaporation, a one-dimensional, Richards' based model, HYDRUS1D, was used to estimate root water uptake under *Jatropha* cultivation using data from the ICRISAT BL3 field. Figure 4 shows a flow diagram of the adopted modeling methodology. ArcSWAT divides rainfall into different hydrological components based on topography, soil, and management practices. Therefore, the ArcSWAT simulation of the Velchal watershed area results in a partitioning of rainwater at the soil surface between runoff and infiltration.

To further analyze the division between transpiration and evaporation, the HYDRUS1D model is used. First, HYDRUS1D was parameterized and calibrated using soil and crop data from the ICRISAT field experimental station. Secondly, the soil properties were changed to represent the Velchal watershed, but without changing the crop water uptake parameterization. The amount of infiltrated water from the ArcSWAT simulation was then used as input to the HYDRUS1D model, and HYDRUS1D then computed soil evaporation, transpiration and deep percolation for the

Velchal watershed. Both ArcSWAT and HYDRUS1D assume a second water-partitioning point in the soil between deep percolation to lower soil layers and evaporative flows. This could potentially cause inconsistencies if the estimates of the water partitioning from the two models of the Velchal watershed differed substantially. It was found, however, that the difference between the models was less than 10%, and the approach combining the two models was therefore considered as giving a sufficiently accurate representation of the Velchal watershed.

ArcSWAT description and inputs

ArcSWAT is a semi-process-based hydrological model for analyzing impacts of land management practices on water flows and sediment loss in complex watersheds.^{43,44} The model integrates the principal hydrological processes, soil and nutrient transport, and vegetative growth on a spatial and temporal frame, using a daily to annual timescale. Surface runoff from daily rainfall is estimated using a modification of the Soil Conservation Service curve number (CN) method from United States Department of Agriculture-Soil Conservation Service^{45,46} and peak runoff rates are estimated using a modified rational method.⁴⁶ SWAT simulates plant growth by using the generic crop growth module from the EPIC (Erosion Productivity Impact Calculator) model.⁴⁶ The crop growth module first calculates the plant growth under optimal conditions, and then computes the actual growth under stress inferred by water, temperature, nitrogen, and phosphorous deficiency.⁴⁷ Sediment yield is estimated using the Modified Universal Soil Loss Equation (MUSLE).⁴⁸ A detailed description of this model is given by Neitsch *et al.*⁴⁶

ArcSWAT requires three basic files for delineating the watershed into sub-watersheds: a Digital Elevation Model (DEM), a soil map and a land use/land cover (LULC) map. The DEM for the Velchal watershed was generated from ASTER 30 m remote sensing data. Only the area marked as 'plantation' in Fig. 1 was included in the model set-up. A soil map of the watershed was prepared by collecting soil samples on a grid structure of approximately 200 m (Fig.1). Undisturbed soil cores (34 cores) were taken for measuring bulk density. Other physical properties such as texture, gravel content, organic carbon, field capacity, and permanent wilting point were estimated in the laboratory. Table 1(a)

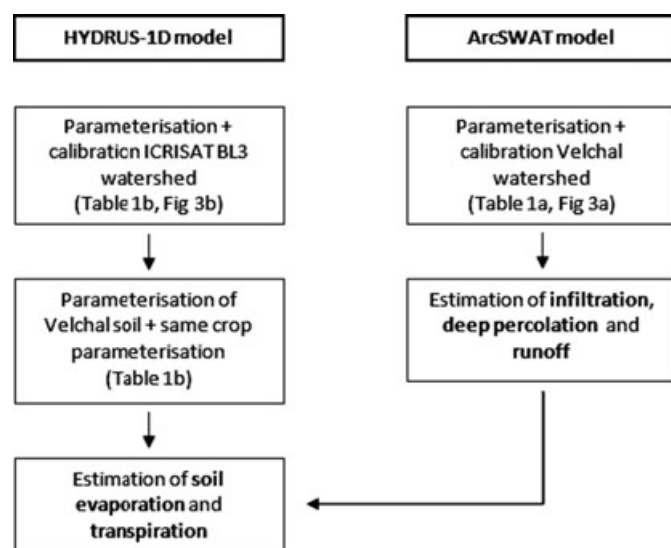


Figure 4. Flow diagram of adopted modeling methodology.

summarizes details of soil physical properties of the Velchal watershed.

A rainfall station (Fig. 1) was installed in the Velchal watershed in 2010. In addition, ICRISAT data of daily rainfall, wind speed, relative humidity, solar radiation, and air temperature were used as meteorological input to the model.

Locations of check-dam storage structures were obtained from GPS readings and their surface area and storage volume were measured. All together, six reservoirs were created (Fig. 1); their year of construction and other salient features (i.e. surface area and total storage capacity) were provided as inputs into model. Rain-fed *Jatropha* is planted in the

Table 1(a). ArcSWAT parameterization.

Variable (unit)	Parameter name	Parameter Value	Source
Sand content (%)	SAND	43 (35-50)*	Measured
Silt content (%)	SILT	17 (15-19)	Measured
Clay content (%)	CLAY	40 (34-47)	Measured
Gravel fraction (%)	ROCK	64 (49-90)	Measured
Bulk Density (g cm ⁻³)	SOL_BD	1.55 (1.4-1.7)	Measured
Available Water Content (mm H ₂ O/mm soil)	SOL_AWC	0.07 (0.03-0.10)	Measured
Organic carbon (%)	SOL_CBN	0.91 (0.6-1.2)	Measured
Soil Depth (mm)	SOL_Z	350 (120-500)	Surveyed
Saturated Hydraulic conductivity (mm/hr)	SOL_K	1.7-5.9	Estimated by Pedo-transfer func. ⁵²
Curve number (-)	CN	86	Calibrated
Hydraulic conductivity of the reservoir bottom (mm/hr)	RES_K	8.0	Measured
Groundwater revapcoeff(-)	GW_REVAP	0.1	From Garg <i>et al.</i> ⁴⁹
Threshold depth of water for revap in shallow aquifer (mm H ₂ O)	REVAP_MN	10	Calibrated
Threshold depth of water in the shallow aquifer required to return flow (mm H ₂ O)	GWQMN	20	Calibrated
Groundwater delay time (days)	GW_DELAY	2	From Garg <i>et al.</i> ⁴⁹
Channel erodibility factor(-)	CH_EROD	0.5	From Garg <i>et al.</i> ⁴⁹
Channel cover factor (-)	CH_COV	0.5	From Garg <i>et al.</i> ⁴⁹
USLE eq. support practice factor (-)	USLE_P	0.5	From Garg <i>et al.</i> ⁴⁹
Peak rate adjust factor for sediment routing in the sub basin (-)	ADJ_PKR	0.5	From Garg <i>et al.</i> ⁴⁹
Linear parameters for cal. of max. amount of sediment to be re-entrained during channel sediment routing	SPCON	0.005	From Garg <i>et al.</i> ⁴⁹
Normal fraction of Nitrogen in (seed) yield (kg N/kg yield)	CNYLD	0.022	Measured at BL3 ICRISAT site ¹¹
Normal fraction of Phosphorus in (seed) yield (kg P/kg yield)	CPYLD	0.0048	Measured at BL3 ICRISAT site ¹¹
Normal fraction of Nitrogen in plant biomass at maturity (Kg N/ Kg yield)	PLTNFR	0.013	Measured at BL3 ICRISAT site ¹¹
Normal fraction of Phosphorus in plant biomass at maturity (Kg P/Kg yield)	PLTPFR	0.0015	Measured at BL3 ICRISAT site ¹¹
Fraction of tree biomass accumulated each year that is converted to residue during dormancy (-)	BIO_LEAF	0.70	Measured at BL3 ICRISAT site ¹¹
Number of years required for tree species to full development (Years)	MAT_YRS	4	Achten <i>et al.</i> ²⁶ ; Bailis and McCarthy ⁵⁰
Maximum biomass for a forest (tons ha ⁻¹)	BMX_TREES	10	Achten <i>et al.</i> ²⁶ ; Bailis and McCarthy ⁵⁰

* Data in parenthesis show minimum to maximum range of parameter value.

whole area included in the analysis. Moreover, some of the parameters values (e.g. soil loss parameters) were based on a previous study⁴⁹ of a nearby watershed, Kothapally (Fig. 1), located in the Musi catchment (Table 1(a)).

ArcSWAT was subsequently calibrated based on reservoir-volume data. The water level in two reservoirs (Check dam 1 and Check dam 2 in Fig. 1) were monitored daily between September and November 2010, and translated into water volumes of the reservoirs based on information on the area of the dams. These check dams are the largest dams in the study area and have a storage capacity in the range 3000–5000 m³. The check dams are not related to the biofuel plantations project *per se*, but were constructed for the purpose of flood prevention and improved groundwater storage. Calibrated parameters were related to surface runoff processes (CN) and base flow (REVP_MN, GWQMN) (Table 1(a)). Important parameters required for simulating crop growth were taken from agronomical measurements and chemical analyses¹¹ at the BL3 ICRISAT experimental

site (Table 1(a)) and from past studies.^{26,50} Seed yield data for *Jatropha* was collected for a three-year period from 2008 to 2010 in Velchal, and used to validate simulated results.

HYDRUS1D description and inputs

HYDRUS1D is a one-dimensional hydrological model for simulating movement of water, heat, and multiple solutes in variable saturated media.⁵¹ This model numerically solves the Richards' equation for saturated-unsaturated water flow; and the Van Genuchten-Mualem, single porosity hydraulic module was selected for simulating water flows. Related soil hydraulic parameters (i.e. θ_r , θ_s , n , α and K_s) were estimated from neural network prediction (inbuilt in the public domain model HYDRUS1D, version 4.14) using basic soil physical properties like texture, bulk density, soil moisture content at field capacity, and permanent wilting point⁵² for different soil layers, which had been measured in the field (Table 1(b)). The parameters θ_r , θ_s are

Table 1(b). HYDRUS1D parameterization.

Soil physical properties of Velchal watershed				
Variable (unit)	Parameter name	Parameter Value, Velchal	Parameter Value, ICRISAT, BL3	Source
Sand content (%)	SAND	43	45.1	Measured
Silt content (%)	SILT	17	16.0	Measured
Clay content (%)	CLAY	40	39.1	Measured
Bulk Density (g cm ⁻³)	BD	1.55	1.4	Measured
Moisture at Field capacity (cm ³ cm ⁻³)	TH33	0.22	0.34	Measured
Moisture at permanent wilting point (cm ³ cm ⁻³)	TH1500	0.16	0.21	Measured
Depth of soil profile (mm)	SOL_Z	350	2000	Surveyed
Root-water uptake parameters, estimated from ICRISAT, BL3 watershed				
Variable (unit)	Parameter name	Parameters Value		Source
Value of the pressure head below which roots start to extract water from the soil, (cm)	P0	-10		Default
Value of the pressure head (cm) below which roots extract water at the max possible rate.	POpt	-25		Default
Value of the limiting pressure head (cm), below which roots cannot longer extract water at the max rate	P2H	-800		Calibrated
As above, but for a potential transpiration rate of r_{2L} . (cm)	P2L	-1500		Calibrated
Value of the pressure head (cm), below which root water uptake ceases (usually wilting point).	P3	-16000		Calibrated

the moisture content at residual and saturated level, n and α are the shape parameters of the soil water retention curve and K_s is the saturated hydraulic conductivity of the soil profile, respectively. A soil profile of 220 cm was defined in the simulation environment and divided into a four-layer system based on measured soil physical properties. Upper boundary conditions (rainfall, potential evapotranspiration, and leaf area index) had been measured in the field for the simulation period, and were provided to the model on a daily time-step. Free drainage conditions were assumed as the lower boundary condition. A root-water uptake module developed by Feddes⁵³ was selected for present study. The model was run for the period October 2005 to October 2008.

Soil moisture data at different soil depths had been collected using a neutron probe at 10 locations in the BL3 watershed with a 15-day interval from October 2005 onwards and was used to calibrate the model. Initially, parameters governing root-water uptake of *Jatropha* was assigned from the default dataset of HYDRUS1D for pasture growth (Table 1(b)), but were subsequently modified by comparing observed soil moisture with observed data at different soil layers (22, 37, 52, 82, 112, and 142 cm) during manual calibration. After calibration, the plant-water uptake parameters were maintained, while the soil characteristics were changed to represent the Velchal watershed instead (Table 1(b)). Thereafter the re-parameterized model was run with the simulated infiltration amounts from the ArcSWAT simulation of the Velchal watershed as soil-water inputs at the soil surface.

Model performance

The simulated reservoir volume was similar to measured volumes (correlation coefficient = 0.97) after calibration (Fig. 5(a)). The Root Mean Square Error (RMSE) of prediction is about 350 m³, which is less than 8% of total storage capacity of the check dams, indicating good model performance. Simulated *Jatropha* yields (dry seed) ranged from 0.4 tons ha⁻¹ to 0.75 tons ha⁻¹, and correspond well to what was harvested at selected locations of the Velchal biofuel plantation. Moreover, the calibration results obtained from HYDRUS1D for the BL3 ICRISAT watershed show good correlation between simulated and observed data

(Fig. 5(b)). The overall RMSE of soil moisture was 0.04 cm³ cm⁻³, while the correlation coefficient ranged between 0.64 and 0.85.

Scenario development and simulation protocol

The calibrated SWAT set-up was run for a 10-year time period (2001 to 2010). Results are presented for dry, normal, and wet years according to the following classification (Indian Meteorological Department, Pune, India; <http://www.imdpune.gov.in>):

- Rainfall less than 20% of the long-term average = dry
- Rainfall between -20% to +20% of the long-term average = normal
- Rainfall greater than 20% of long-term average = wet

The annual average rainfall of the study area is 910 mm in the period from 2001 to 2010. Three scenarios were analyzed in the study:

- i) The *Wasteland* scenario represents the situation where the landscape is in a degraded stage. Soils are highly eroded and poor in organic matter and have poor water-holding capacity. Bushes and seasonal grasses dominate the landscape, which is used for grazing.
- ii) The *Current Jatropha* scenario represents the situation where *Jatropha* is cultivated and some soil and water conservation measures (*in situ* interventions) are implemented. Leaf fall, stem, and other bush/tree biomass are being added to the soil mainly at dormancy period. *Jatropha* seeds are harvested by the local community.
- iii) The *Long-term Jatropha* scenario represents a thought situation where the conditions in the *Current Jatropha* scenario have been maintained for a long period of time, leading to increased soil organic matter and changed soil characteristics with regard to infiltrability and soil water holding capacity.¹¹

The *Wasteland* scenario was created by removing the current vegetation cover in the ArcSWAT parameterization, while the parameterization procedure of the *Current Jatropha* scenario was done as described above.⁴⁹ Finally, the *Long-term Jatropha* scenario was parameterized based on modifying selected parameters as described in Table 1(c): (i)

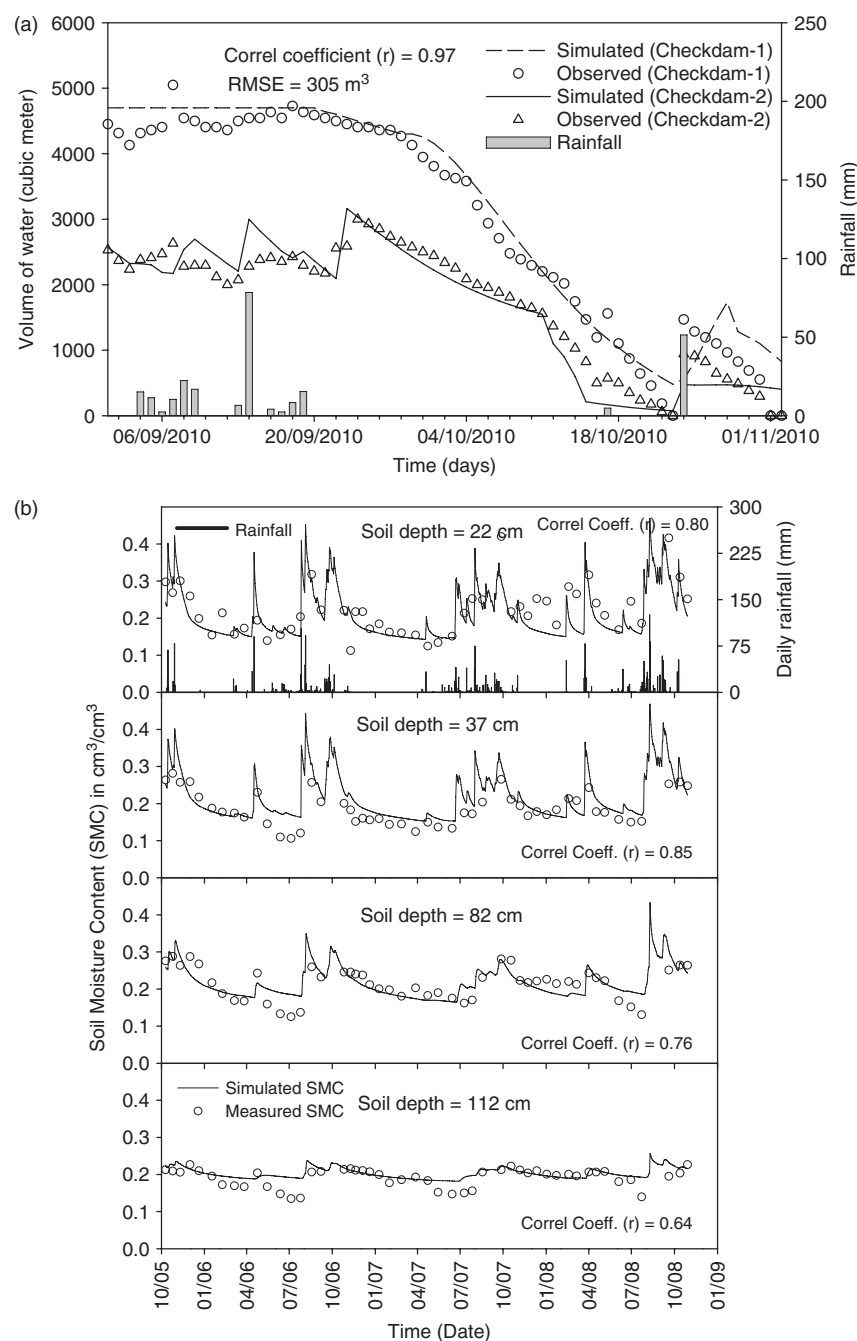


Figure 5. (a) Observed and simulated water volume in check dams between period Sept and Nov 2010. (b). Observed and simulated soil moisture content at different soil depth in *Jatropha* planted area of ICRISAT BL3 watershed from period Oct 2005 to Oct 2009.

20% increase in soil carbon content (same as for the long-term biofuel plantations at the ICRISAT experimental station); and (ii) changed soil characteristics (parameterization taken from the *in situ* soil water management scenario in the nearby Kothapally watershed, as described in Garg *et al.*⁴⁹

Results

Impact of *Jatropha* plantation on water balance

The water balance for the area under study differs substantially depending on land use and amount of annual average

Table 1(c). SWAT parameters modified from current setup to represent improved organic condition.

Variable (unit)	Parameter in ArcSWAT	Parameter Value: current Jatropha scenario	Parameters Value: long-term Jatropha scenario
Available Water Content (mm H ₂ O/mm soil)	SOL_AWC	0.07 (0.03-0.10)	0.08 (0.03-0.13)
Organic carbon (%)	SOL_CBN	0.91 (0.6-1.2)	1.1 (0.75-1.5)
Curve number (-)	CN	86	80
Groundwater revap coeff(-)	GW_REVAP	0.1	0.15
Threshold depth of water for revap in shallow aquifer (mm H ₂ O)	REVAP_MN	10	2
Threshold depth of water in the shallow aquifer required to return flow (mm H ₂ O)	GWQMN	20	120
Channel erodibility factor(-)	CH_EROD	0.5	0.4
Channel cover factor (-)	CH_COV	0.5	0.6
USLE equation support practice factor (-)	USLE_P	0.5	0.6

rainfall (Fig. 6(a)). In general, a larger share of the total rainfall forms runoff during wetter years compared with drier years. For the *Wasteland* scenario, runoff constituted 40–60% of total rainfall amount, while for the *Long-term Jatropha* scenario, the corresponding figure is 20–40%. Between 4 and 17% of total rainfall was going to groundwater recharge, while the remainder was transferred to the atmosphere through evaporation or evapotranspiration (ET).

A comparison of the different land-management scenarios shows that more than 50% of the non-productive soil evaporation in the *Wasteland* scenario is shifted into productive transpiration in the two *Jatropha* plantation scenarios (Fig. 6(a)), while the total amount of ET is relatively similar in all three scenarios, except during dry seasons when ET is higher in the *Jatropha* scenarios, and even higher under improved soil conditions. Groundwater recharge doubles in the *Current Jatropha* scenario and quadruples in the *Long-term Jatropha* scenario, compared with the *Wasteland* scenario (Fig. 6(a)). As a result of higher ET and groundwater formation, runoff formation decreases in the *Jatropha* scenarios, in particular during dry years. In the *Wasteland* scenario, runoff constitutes around 40% of the total rainfall during dry years while the corresponding figure for the *Current Jatropha* scenario is around 30%, and even lower (down to 20%) for the *Long-term Jatropha* scenario. Such a large reduction in outflows from the watershed at a time when the average rainfall

amount is low might have negative impacts on downstream ecosystems and water users.

The distribution of the water balance components over the year also varies with land-use (Fig. 6(b)). While the total ET is lower for the two *Jatropha* plantation scenarios during the dry season (December–March), it becomes higher during the wetter parts of the year. This means that the annual fluctuations in runoff and groundwater generation are smaller in the *Jatropha* plantation scenarios, compared with the *Wasteland* scenario.

Runoff generated from the watershed consists of two components: (i) surface runoff and (ii) base flow generation. It was found that even though the total runoff was significantly lower with *Jatropha* plantations compared with the *wasteland* condition, base flow was in fact higher with *Jatropha* plantations (Fig. 6(c)). On an average, the total amount of base-flow generation in the *Wasteland* scenario was only 70% of the base flow in the *Jatropha* scenarios; however, total runoff was 40% larger for the *wasteland* state compared with the *Long-term Jatropha* scenario.

Land management also affects runoff intensity. In general, higher runoff intensities were predicted for the *wasteland* state, compared with *Jatropha* plantations (Fig. 6(d)). The results show that the average daily runoff intensity decreased by 12 % for the *current Jatropha* plantation, compared with the *wasteland* condition, and is likely to decrease even further with continued *Jatropha* cropping (the *Long-term Jatropha* scenario had 39% lower runoff intensity than the *Wasteland* scenario).

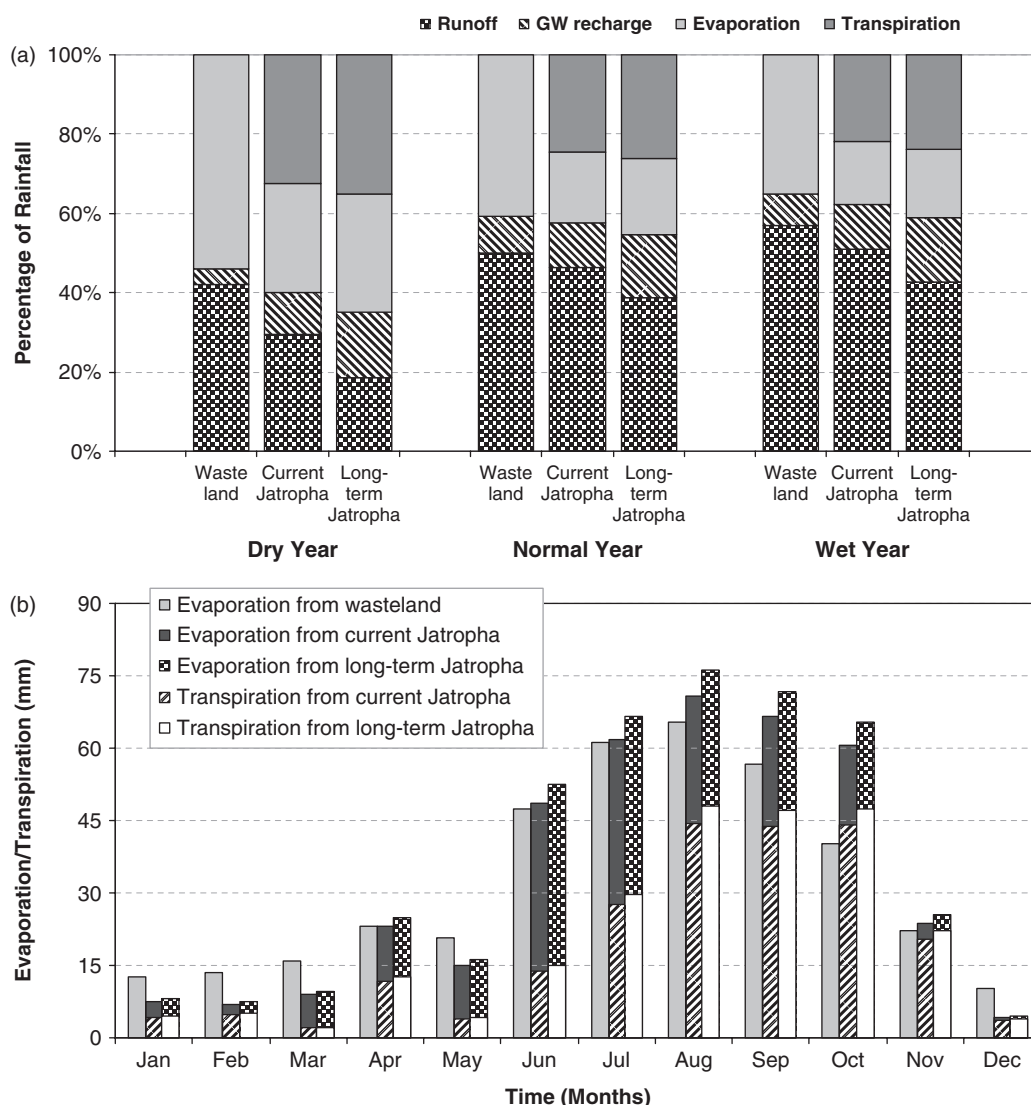


Figure 6. (a) Water balance components of different land management scenarios during dry, normal and wet (data from 2001 to 2010). (b). Monthly soil evaporation and transpiration for three different land management scenarios in Velchal watershed.

A comparison of water balance among BL3 ICRISAT and Velchal watershed

A comparison of water balance components between the well-managed ICRISAT BL3 watershed and the Velchal community site (*Current Jatropa* scenario) shows (Table 2) that a larger part of the rainfall formed green water flows (i.e. evapotranspiration) at the well-managed site (80–90% compared with 40–60%, respectively). This means that only a small fraction (10–20%) of the total rainfall generated blue water flows (runoff and groundwater recharge) at the

ICRISAT BL3 location. During dry years, blue water generation was lower than green water generation at both sites. The division between green and blue water components for Jatropa at the well-managed site corresponds well with those observed for many water-demanding cereal crops.⁵⁴

Sediment transport and soil loss

Currently, the estimated average soil loss in the Velchal watershed is between 10 and 15 tons ha⁻¹yr⁻¹. Because the soil depth is low and the available water holding capacity

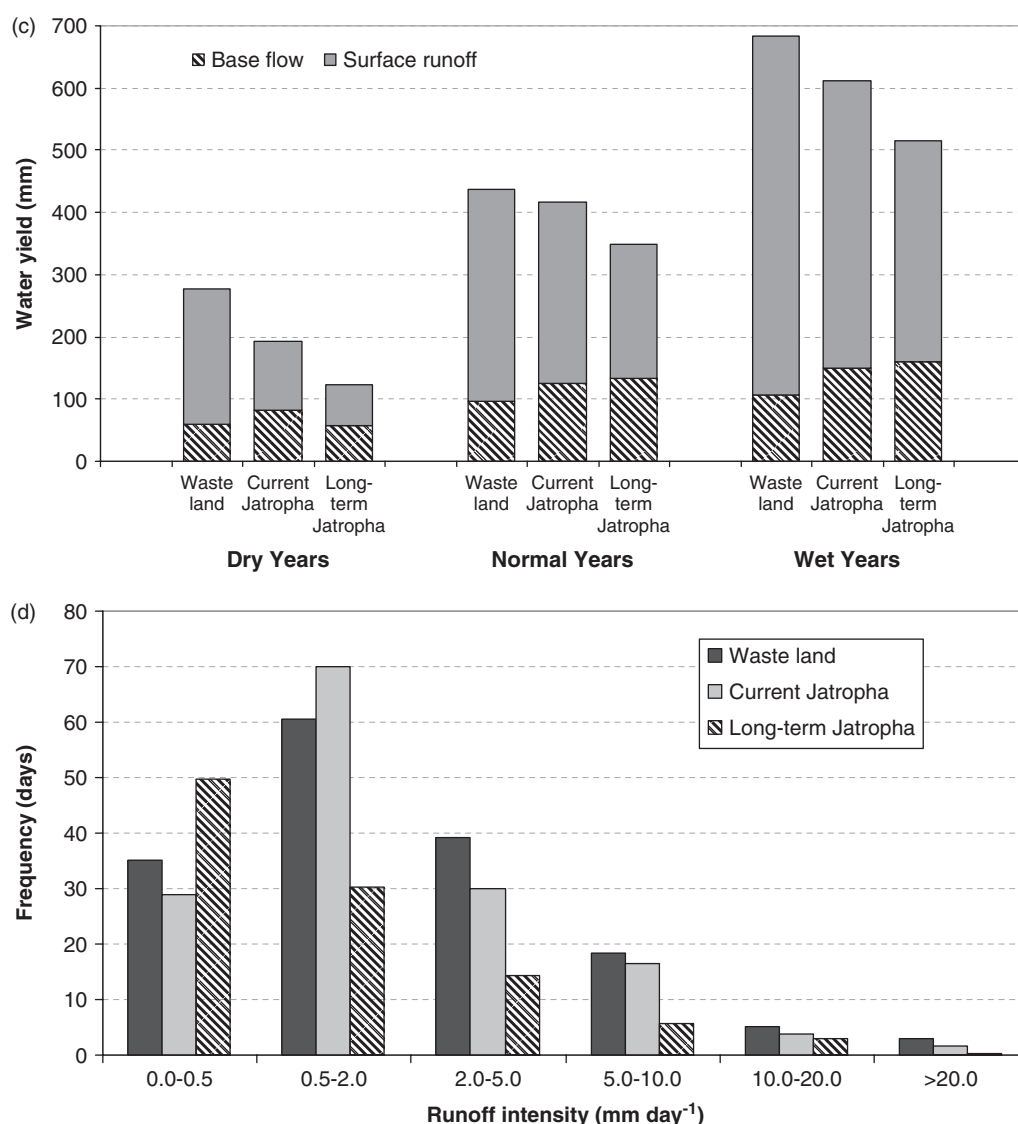


Figure 6. (c) Total runoff generation from the watershed, divided up into base flow and surface runoff, for three different land management scenarios during dry, normal and wet years (data from 2001 to 2010). (d). Frequency of daily runoff intensity, for three different land management scenarios (data from 2001 to 2010).

is poor in the watershed, large runoff is commonly generated during rain, with the capacity to carry large amounts of sediments. Soil loss was found to increase exponentially with rainfall intensity, and varied with land use (Fig. 7(a)), so that the highest soil loss occurred at high rainfall intensities under wasteland conditions. Cumulative soil loss generated at the watershed outlet over a ten-year period showed that Jatropa cultivation resulted in a reduction of the total soil loss amount of nearly 50% compared to the wasteland

state (Fig. 7(b)). With improved soil conditions (*Long-term Jatropa* scenario), soil loss decreased even further.

Jatropa growth and crop yield

Crop growth parameters measured at ICRISAT and Velchal during 2008 are presented in Table 3. Jatropa seed yields are below 0.5 tons ha⁻¹ within the three years of plantation at ICRISAT but afterwards increased substantially. Jatropa seed yields in the Velchal watershed after year three and

Table 2. Comparison of different hydrological components and crop yields between the ICRISAT BL3 watershed, and the Velchal watershed (Current *Jatropha* scenario).

Variable (unit)	Dry Year (Year 2007)		Wet Year (Year 2008)	
	ICRISAT watershed, BL3	Velchal watershed	ICRISAT watershed, BL3	Velchal watershed
Inputs				
Available water ($\text{cm}^3 \text{ cm}^{-3}$) (soil moisture at FC-PWP)	0.13	0.07	0.13	0.07
Soil depth (cm)	300	35	300	35
Annual average rainfall (mm)	707	707	1105	1105
Outputs				
Evaporation (mm)	251 (36%)	188 (27%)	265 (24%)	180 (16%)
Transpiration (mm)	400 (57%)	263 (37%)	606 (55%)	262 (24%)
Outflow (mm)	ND	162 (23%)	ND	550 (50%)
GW recharge/Deep percolation (mm)	ND	95 (13%)	ND	111 (10%)
<i>Jatropha</i> seed yield (tons ha^{-1})	0.9	0.5	1.1	0.5
FC = field capacity; PWP = permanent wilting point; ND = not determined.				

onwards varied ($0.3\text{--}0.8\text{tons ha}^{-1} \text{ yr}^{-1}$) depending on rainfall variability.¹¹ At the ICRISAT BL3 site, the corresponding figure is $1.0\text{--}2.7\text{tons ha}^{-1}\text{yr}^{-1}$. The relatively poor seed yield in Velchal is due to water and nutrient stress, as confirmed by model simulations (data not shown). Table 2 shows the difference in soil physical and land management conditions of two experimental sites. *Jatropha* plants at the ICRISAT micro-watershed could utilize more green water compared to *Jatropha* plants at the Velchal watershed. Moreover, three-year-old plantations recycled 20.8 Kg N, 2.0 Kg P and 23 Kg K ha^{-1} through leaf fall (Table 3). This nutrient recycling has an important role in sustaining the productivity of the landscape and building carbon stocks.^{4,11}

Discussion

Soil and water-related impacts

Wastelands are characterized by sparse vegetation cover, exposing soils to both rainfall and solar radiation. Large soil losses occur during instances of intensive rainfall, and the non-productive soil evaporation can be very large due to the lack of vegetative cover. The results show that under favorable soil management and with a good water supply, the water uptake of *Jatropha* is similar to that of many water-demanding cereal crops. However, on wastelands where crop management is quite difficult, *Jatropha*

plantations might be a better option for enhancing productive water flows and at the same time protect these areas from further degradation.⁷

The results from this study confirm the hypothesis that *Jatropha* plantations on wastelands can have several positive effects in relation to soil and water:

- Reduced soil losses due to lower erosion rates when the soils are better protected by vegetation and roots. Besides the on-site benefits this also has the benefit that sedimentation loads in rivers and other water bodies are reduced.
- Increased soil carbon content, which changes the soil physical characteristics so that both water infiltrability and soil water-holding capacity increase. The soil carbon increase also enhances the climate change mitigation benefit by withdrawing CO_2 from the atmosphere.
- Redirection of non-productive soil evaporation into productive transpiration, which improves the field level water productivity.
- Increased groundwater recharge.

A potential risk with the *Jatropha* plantations is reductions in runoff generation resulting in reduced downstream water availability. In this study, the total runoff amount was modeled to be 40% larger for the wasteland condition, but despite of this, base flows were higher when *Jatropha* was grown. Runoff intensities were at the same time lower, which

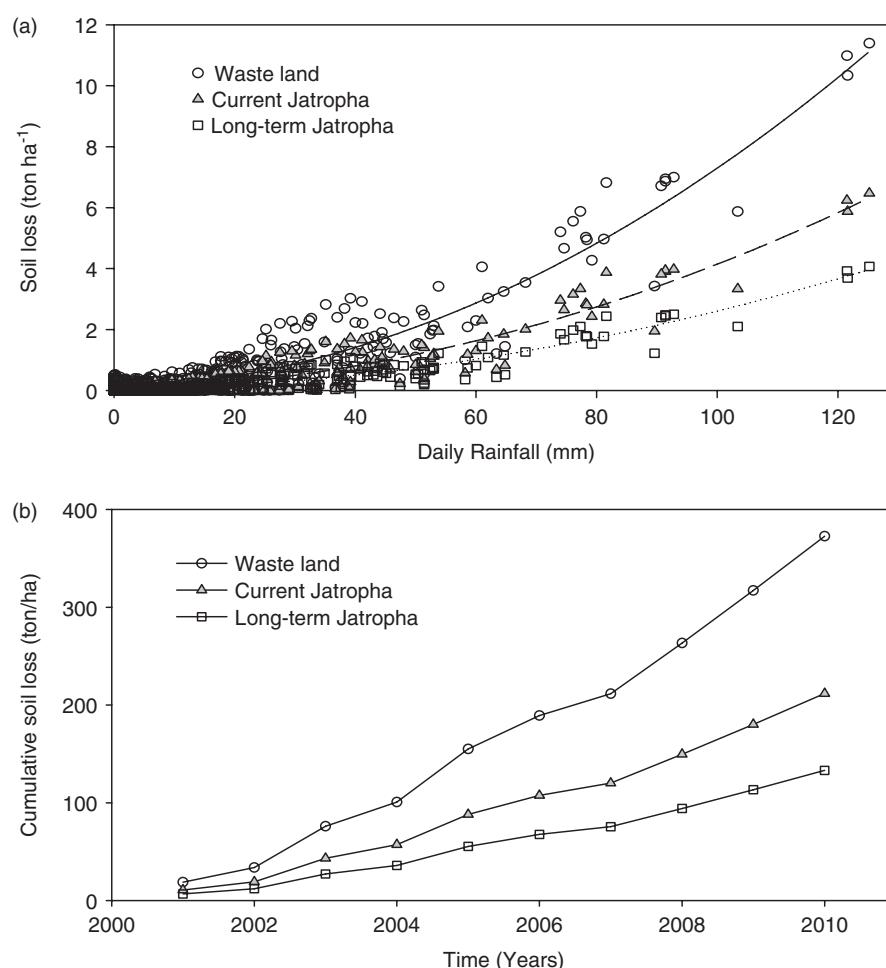


Figure 7. (a) Impact of land management practices on sediment transport under different land management conditions (data from year 2001 to 2010). (b). Cumulative soil loss (tons ha⁻¹) under different land management conditions (data from year 2001 to 2010).

is generally positive, since it reduces the risks of flooding of cultivated areas. Higher base flow results in smaller differences between high and low flows in rivers, which again is beneficial from a flood-risk perspective. Most likely this is also positive for the riverine ecosystems, since rivers in this region are perennial and thus require a certain amount of base flow to sustain key processes and functions.

Thus, under the conditions existing in the Velchal watershed, the establishment of Jatropha plantations appears to be an attractive option. A larger share of the rainfall was channeled to productive transpiration and groundwater recharge, and a more stable (less erosive) runoff improved the downstream water conditions. On the other hand, maintaining a certain amount of total annual runoff is crucial for the

Manjeera dam located downstream of the watershed (Fig. 1), which is one of the drinking-water supplies for the rapidly growing city of Hyderabad. If Jatropha plantations were implemented on a large scale upstream, resulting in higher consumptive water use, the concurrent reductions in runoff, in particular during dry seasons, might result in trade-offs between upstream and downstream water users, and potentially also impact riverine ecosystems. Downstream water availability is likely to be least affected in good years or high and moderate rainfall zones but could be an important constraint in dry years or low rainfall zones of semi-arid tropics.^{55–57} Again, this should be weighed against the positive effects of reduced sedimentation in rivers and dams due to the reduced soil loss from Jatropha plantations. In order to

Table 3. Growth parameters of *Jatropha* crop and nutrient content in fallen leaves and *Jatropha* seeds measured from the experimental sites (Data collected in year 2008, Sreedevi et al.¹⁴; Wani et al.¹¹).

Variable (unit)	ICRISAT BL3 watershed	Velchal watershed
Jatropha Tree age (years)	3	2
Plant spacing	3 m x 2 m	2 m x 2 m
Plant Height (cm)	120 (64–196)*	86 (50–114)
Branches per Plant (-)	8 (1–38)	5 (2–7)
Stem girth at 10 cm height (cm)	21 (6–44)	15.6 (9.2–20.3)
Crown Area (m ²)	0.9 (0.5–4.1)	-
No. of flowering branches (-)	3 (1–7)	-
No of inflorescences per plant (-)	3 (1–8)	-
Female-male flower ratio (-)	(4–17)	-
No. of Female flowers (-)	(2–45)	-
Pod bunches per plant	(1–7)	-
No of pods per plant	(3–90)	-
Seed yield per plant (g)	(28–280)	-
100 seed weight (g)	(44–72)	-
Total seed yield (tons ha ⁻¹)	(0.2–0.5)	0.1
Total oil content (%)	34 (27–38)	-
Nitrogen content in Seed (g kg ⁻¹)	22.2	-
Phosphorus content in Seed (g kg ⁻¹)	4.8	-
Potassium content in Seed (g kg ⁻¹)	8.1	-
Sulphur content in Seed (g kg ⁻¹)	1.4	-
Boron content in Seed (g kg ⁻¹)	0.015	-
Zinc content in Seed (g kg ⁻¹)	0.017	-
N content in fallen Leaves (g kg ⁻¹)	9.5	-
P content in fallen Leaves (g kg ⁻¹)	0.7	-
K content in fallen Leaves (g kg ⁻¹)	10	-
S content in fallen Leaves (g kg ⁻¹)	0.94	-
B content in fallen Leaves (g kg ⁻¹)	0.034	-
Zn content in fallen Leaves (g kg ⁻¹)	0.024	-
Seed Yield measured from the fourth year onwards (tons ha ⁻¹)	1.0–2.7	0.3–0.8

* Data in parenthesis show minimum to maximum range of parameter value.

analyze effects of different upstream land-use alternatives on the various stakeholders in the sub-basin, an integrated assessment of various land-use and management options for the whole sub-basin area has to be made.

Soil loss and soil degradation might become an increasingly important factor to account for in the future.^{58,59} It is apparent that soil loss from the fields at rainfall intensities above 30–50 mm day⁻¹ is significant,⁴⁹ in particular for

wastelands. Due to climate change, high rainfall intensities are projected to become more common in different parts of India^{60–62} and elsewhere in the world.^{63–65} Soil loss from the fields can therefore be expected to increase.^{66–68} Once land degradation has begun, the process may eventually become difficult to halt since the lack of vegetation causing high soil loss makes rehabilitation more difficult.^{69–72} Hence, a vicious circle may be established, which is difficult

to interrupt due to the negative feedback mechanisms between canopy coverage, runoff generation, and soil loss. Other studies have shown that *Jatropha* has the potential to rehabilitate landscapes that have been badly degraded^{5,26} and can also induce carbon sequestering in soils.⁷³ For Indian wasteland, an average annual carbon sequestration rate of 2.25 tons CO₂ ha⁻¹ year⁻¹ has been reported for the case of *Jatropha*.¹¹

Contributions to improved livelihood conditions

Several negative consequences of *Jatropha* have been assessed at larger scale of implementation.^{74–77} It has not been found socially and economically viable to switch agricultural land into biofuel plantations.^{78,79} Conversion of agricultural land to *Jatropha* has not been found economically beneficial for rain-fed or irrigated lands in private farms in Tamil Nadu, India, and the potential variability is strongly determined by water access.⁸⁰ Unrealistic claims on yield predictions mainly in low-input regions by various development agencies led to serious conflicts between the state and the farmers, between socio-economic classes, and even within households.⁸⁰

The present study does not challenge the objection against planting *Jatropha* on agricultural land. However, it is shown that wasteland that does not support conventional crop cultivation can be suitable for *Jatropha* cultivation involving the local community. In the current case study, *Jatropha* cropping has provided the local community in the Velchal watershed with an additional source of income, which strengthens the resilience of the village by enabling farmers to operate on different markets (food and energy). Currently, the income from the *Jatropha* cultivation is relatively small in relation to total household budgets. Harvested *Jatropha* seeds generate an income of approximately USD\$100 ha⁻¹ year⁻¹ (considering seed yield between 0.5 and 1.0 tons ha⁻¹ after the fourth year and onwards^{11,14} and *Jatropha* seed cost as USD\$0.22 kg⁻¹ (10 INR kg⁻¹)^{11,80}, which can be compared with incomes from agricultural crops grown in the area at around USD\$400–500 ha⁻¹ year⁻¹ (assuming a cropping intensity of 150% and average crop yields at 1–2 tons ha⁻¹ in arid and semi-arid tropics under rain-fed conditions^{81–83}). However, the economic returns from the biofuel plantations will be higher if the biofuel prices increase in the future. Moreover, the present seed

yields are less than half of the potential seed yields, which are estimated to be about 2.5 tons ha⁻¹ under rain-fed conditions.¹¹ This indicates substantial scope for further yield improvements through better management practices, such as nutrient application coupled with improved soil and water conservation, and subsequently higher economic returns.

The beneficiaries of the *Jatropha* plantations on former wasteland in the Velchal watershed are mainly landless laborers and marginal farmers. There are plans to put an oil expeller unit for oil extraction and a power-generator unit for electricity production in the Velchal village.¹⁴ The intention is to sell the generated electricity to commercial users in the village itself, thus providing additional income. Moreover, this program has also helped to generate other employment opportunities for some of the women's groups in starting plant nurseries and supplying quality seedlings.¹¹

The grazing that was practiced before the *Jatropha* establishment could continue as an integrated land-use activity together with the *Jatropha* cultivation, and this grazing no longer caused land degradation. This means that nobody in the village lost their customary right due to the *Jatropha* plantations. Grazing in *Jatropha* plantations may raise concerns about the potential intoxication of livestock. Toxicity in *Jatropha* is due to the presence of toxalbumin of nomecurcin (toxin protein), which irritates the gastrointestinal mucosa and also hemoagglutinating and causes nausea, vomiting, intense abdominal pain, and diarrhea with bloody stool.⁸⁴ However, cases of livestock intoxication has not been reported so far.

An additional benefit for the community is higher groundwater tables, which improves access to water for domestic and agricultural use. Achten *et al.*⁷ thoroughly discussed the benefits of *Jatropha* cultivation on wasteland at local scale. The seed cake that is obtained as a byproduct from oil extraction cannot be used for animal feeding due to its toxic content. But it could potentially be used as fertilizer¹¹ that also serves as biopesticide/insecticide and molluscicide.⁸⁵ Moreover seed cake could be used for biogas production through anaerobic digestion before using it as a soil amendment.⁸⁶

Model and data uncertainties

The approach to combine the two modeling tools ArcSWAT and HYDRUS1D causes a risk for small discrepancies in the

estimations of the division between deep percolation and ET. Ideally, both soil evaporation and transpiration should be calculated explicitly in ArcSWAT, but this was not possible in the current model version. The parameterization of the different land-management scenarios for Velchal was based on analyses from Kothapally, which is located at a nearby watershed in the Osman Sagar catchment area as shown in Fig. 1.⁴⁹ This may lead to some uncertainty in results and additional validation to support the model parameterization may further improve the confidence of the modeling results. Even so, the data quality and overall model performance is judged to be satisfactory for the purposes of this study, and for supporting the conclusions made.

Conclusion

Overall, changes arising from the conversion of wastelands into *Jatropha* plantations were desirable from an ecosystem's perspective at the watershed scale. Non-productive soil evaporation was shifted to productive transpiration, ground-water recharge improved, base flow improved while storm flows and sedimentation loads were lower as soil loss from the fields was reduced. Moreover, it was found that the soil carbon content increased in the *Jatropha* plantations over time creating a win-win situation between land productivity and climate change mitigation.

At the same time, results from this study indicate that at the sub-basin scale, reductions in runoff generation as a result of converting wastelands to *Jatropha* plantations may pose problems for downstream ecosystems and water users if implemented on a large area. The net impact of these changes depends on the characteristics of downstream water users and ecosystems.

At the community level, *Jatropha* production was generally positive from a livelihood perspective. The previous land use, in this case grazing, could continue in the *Jatropha* plantations, which provided a new source of income, thus strengthening the resilience of the farmers. In the future, the potential revenues from *Jatropha* production may be higher than today, as plantation yields increase and demand for petroleum substitutes such as *Jatropha* biodiesel grows.

Acknowledgement

The authors would like to thank Dr A.V.R. Kesava Rao, Scientist, ICRISAT for providing soil moisture data of the

BL3, ICRISAT watershed, and Mr Ch Srinivas Rao for his help in data collection at the Velchal watershed. The authors are grateful to the watershed community of the Velchal village for participating in the biofuel project and for their support. The authors are also grateful to the funding agency, National Oilseeds and Vegetable Oils Development Board, Government of India, for providing development funds for the *Jatropha* plantation in the Velchal watershed. We are grateful to two anonymous reviewers who provided constructive comments and important suggestions, which greatly helped us to improve our manuscript.

References

1. TERI, *Directions, Innovations and Strategies for Harnessing Action for Sustainable Development*. New Delhi, The Energy and Resources Institute (2002).
2. Government of India, *Ministry of Petroleum and Natural Gas, Annual report 2006/07* [Online]. Government of India (2006). Available at: URL: http://petroleum.nic.in/jsp/annual_report.jsp [May 15, 2011].
3. Government of India, *National Policy on Biofuels*. Ministry of New & Renewable Energy, New Delhi (2009).
4. Achten WMJ, Maes WH, Aerts R, Verchot L, Trabucco A, Mathijs E, Singh VP and Muys B, *Jatropha: From global hype to local opportunity*. *J Arid Environ* **74**:164–165 (2010).
5. Phalan B, The social and environmental impacts of biofuels in Asia: An overview, *Appl Energy* **86**:S21–S29 (2009).
6. Government of India, *Ministry of Petroleum and Natural Gas, Annual report 2009/10* [Online]. Government of India (2009). Available at: http://petroleum.nic.in/jsp/annual_report.jsp [May 15, 2011].
7. Achten WMJ, Almeida J, Fobelets V, Bolle E, Mathijs E, Singh VP, Tewari DN, Verchot LV and Muys B, Life cycle assessment of *Jatropha* biodiesel as transportation fuel in rural India. *Appl Energy* **87**:3652–3660 (2010).
8. Government of India, *Wasteland Atlas of India* [Online]. Government of India (GOI), Ministry of Rural Development, Department of Land Resources, New Delhi, India (2010). Available at: www.dolr.nic.in/wasteland_atlas.htm [May 15, 2011].
9. Ramachandra TV and Kumar R, Wastelands: rehabilitation and management approaches. *Low External Input Sustainable Agriculture* **5**(4): 10–12 (2003).
10. Sathaye J, Makundi W and Andrasko K, Management of forests for mitigation of greenhouse gas emissions. *Mitigation and Adaptation Strategies for Global Change* **6**(3–4):183–184 (2001).
11. Wani SP, Sreedevi TK, Marimuthu S, Kesava Rao AVR and Vineela C, Harnessing the potential of *Jatropha* and *Pongamia* plantations for improving livelihoods and rehabilitating degraded lands. *6th International Biofuels Conference*, March 4–5, New Delhi, India (2009).
12. Wani SP and Sreedevi TK, *Pongamia's Journey from forest to Micro-enterprise for improving livelihood*, *International Crop Research Institute for the Semi-Arid Tropics*. Research Report, Global Theme of Agroecosystems, Patancheru, India (2005).

13. Wani SP, Osman M, D'Silva E and Sreedevi TK, Improved livelihoods and environmental protection through biodiesel plantations in Asia. *Asian Biotechnology and Development Review* **8**(2):11–29 (2006).
14. Sreedevi TK, Wani SP, Srinivasa Rao CH, Chaliganti R and Reddy RL, Jatropha and Pongamia rain-fed plantations on wastelands in India for improved livelihoods and protecting environment. *6th International Biofuels Conference*, March 4–5 New Delhi, India (2009).
15. Srivastava P, Poverty targeting in India, in *Poverty Targeting in Asia*, ed by Weiss J. Cheltenham, Edward Elgar Publishing Limited, pp 34–78 (2005).
16. Tatikonda L, Wani SP, Kannan S, Beerelli N, Sreedevi TK, Hoisington DA, Devi P and Varshney RK, AFLP-based molecular characterization of an elite germplasm collection of *Jatropha curcas* L., a biofuel plant. *Plant Sci* **176**(4):505–513 (2009).
17. Divakara BN, Upadhyaya HD, Wani SP and Laxmipathi G, Biology and genetic improvement of *Jatropha curcas* L. A review. *Appl Energy* **87**:732–742 (2010).
18. Trabucco A, Achten WMJ, Bowe C, Aerts R, Orshoven JV, Norgrove L and Muys B, Global mapping of *Jatropha curcas* yield based on response of fitness to present and future climate. *GCB Bioenergy* **2**:139–151 (2010).
19. Francis G, Edinger R and Becker K, A concept for simultaneous waste-land reclamation, fuel production, and socio-economic development in degraded areas in India: need, potential and perspectives of Jatropha plantations. *Nat Resour Forum* **29**:12–24 (2005).
20. Kumar A and Sharma S, An evaluation of multipurpose oil seed crop for industrial uses (*Jatropha curcas* L.): A review. *Ind Crop Prods* **28**:1–10 (2008).
21. daScho B, *Jatropha curcas* L., a potential bioenergy crop. On field research in Belize. MSc dissertation, Padua University, Italy and Wageningen University and Research centre, Plant Research International, the Netherlands (2010).
22. Jingura RM, Matengaifa R, Musademba D and Musiyiwa K, Characterisation of land types and agro-ecological conditions for production of Jatropha as a feedstock for biofuels in Zimbabwe. *Biomass Bioenergy* **35**:2080–2086 (2011).
23. Kaushik N, Kumar K, Kumar S, Kaushik N and Roy S, Genetic variability and divergence studies in seed traits and oil content of Jatropha (*Jatropha curcas* L.) accessions. *Biomass Bioenergy* **31**:497–502 (2007).
24. Sunil N, Varaprasad KS, Sivaraj N, Kumar TS, Abraham B and Prasad RBN, Assessing *Jatropha curcas* L. germplasm in situ – A case study. *Biomass Bioenergy* **32**:198–202 (2008).
25. Carels N, Chapter 2 *Jatropha Curcas*: A review. *Adv Bot Res* **50**:39–86, (2009).
26. Achten WMJ, Verchot L, Franken YJ, Mathijs E, Singh VP and Aerts R, Review: *Jatropha* bio-diesel production and use. *Biomass Bioenergy* **32**:1063–1084 (2008).
27. Behera SK, Srivastava P, Tripathi R, Singh JP and Singh N, Evaluation of plant performance of *Jatropha curcas* L. under different agro-practices for optimizing biomass- A case study. *Biomass Bioenergy* **34**:30–41 (2010).
28. Ghosh A, Chikara J and Chaudhary DR, Diminution of economic yield as affected by pruning and chemical manipulation of *Jatropha curcas* L. *Biomass Bioenergy* **35**:1021–1029 (2011).
29. Foidl N, Foidl G, Sanchez M, Mittelbach M and Hackel S, *Jatropha curcas* L. as a source for the production of biofuel in Nicaragua. *Bioresour Technol* **58**:77–82 (1996).
30. Jongschaap REE, Corre WJ, Bindraban PS and Brandenburg WA, Claims and facts on *Jatropha curcas* L. Plant Research International B.V., Wageningen, the Netherlands (2007).
31. Jain S and Sharma MP, Biodiesel production from *Jatropha curcas* soil. *Renew Sust Energy Rev* **14**:3140–3147 (2010).
32. Koh MY and Ghazi TID, review of biodiesel production from *Jatropha curcas* L. oil. *Renew Sust Energy Rev* **15**:2240–2251 (2011).
33. Feng S, Krueger AB and Oppenheimer M, Linkages among climate change, crop yields and Mexico-US cross-border migration. *Proc Natl Acad Sci USA* **107**:14 257–262 (2010).
34. Hanjra MA and Qureshi ME, Global water crisis and future food security in an era of climate change. *Food Pol* **35**:365–377 (2010).
35. Parry M, Rosenzweig C and Livermore M, Climate change, global food supply and risk of hunger. *Phil Trans R Soc B* **360**:2125–2138 (2010).
36. IPCC, *The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*. Cambridge University Press, Cambridge (2007).
37. Schio B, *Jatropha curcas* L., a potential bioenergy crop, On field research in Belize. MSc dissertation, Padua University, Italy and Wageningen University and Research centre, Plant Research International, the Netherlands (2010).
38. Daey Ouwens K, Francis G, Franken YJ, Rijnssensbek W, Riedacker A, Foidl N, Jongschaap REE and Bindraban PS, Position Paper on *Jatropha curcas*. State of the Art, Small and Large Scale Project Development. *Expert seminar on Jatropha curcas L. Agronomy and Genetics*. FACT Foundation, Wageningen, the Netherlands, 26–28 March (2007).
39. Henning R, The *Jatropha* Book, The Jatropha System, an integrated approach of rural development [Online]. Weissenberg, Germany (2009). Available at: <http://www.Jatropha.de> [May 15, 2011].
40. Mandal R and Mittra P, Bio-fuels: Indian scenarios and policy issues. Proceedings of the International conference on Biofuels: Prospective and prospects, September 16/17, New Delhi, India (2004).
41. Wani SP and Chaliganti R, Rural livelihood and urban environment: An assessment of the bio-fuel programme for the emerging megacity of Hyderabad, Research Report 14. Department of Agricultural Economics and Social Sciences, Division of Resource Economics, Humboldt University, Berlin (2007).
42. Falkenmark M, *Coping with water scarcity under rapid population growth*. Conference of SADC Ministers, Pretoria, 23/24 November (1995).
43. Arnold JG and Fohrer N, SWAT2000: current capabilities and research opportunities in applied watershed modeling, *Hydrol Process* **19**:563–572 (2005).
44. Gassman PW, Reyes MR, Green CH and Arnold JG, The soil and water assessment tool: Historical development, application and future research directions. *Transactions of the ASABE* **50**(4): 1211–1250 (2007).
45. Arnold JG and Allen PM, Estimating hydrologic budgets for three Illinois watersheds. *J Hydrol* **176**:57–77 (1996).
46. Neitsch SL, Arnold JG, Kiniry JR, Williams JR and King KW, Soil and water assessment tool, Theoretical documentation, Version 2005. Temple, TX, USA (2005).
47. Luo Y, He C, Sophocleous M, Yin Z, Hongrui R and Ouyang Z, Assessment of crop growth and soil water modules in SWAT2000 using extensive field experiment data in an irrigation district of the Yellow River Basin. *J Hydrol* **352**:139–156 (2008).

48. Williams JR, Sediment-yield prediction with universal equation using runoff energy factor, in *Present and Prospective Technology for Predicting Sediment Yield and Sources: Proceedings of the Sediment Yield Workshop*, USDA Sedimentation Lab., Oxford, MS, November 28–30, 1972, ARS-S-40 (1975).
49. Garg KK, Karlberg L, Wani SP, Barron J and Rockström J, Assessing impact of agricultural water interventions at the Kothapally watershed, Southern India. *Hydro Process* DOI: 10.1002/hyp.8138 (2011).
50. Bailis R and McCarthy H, Carbon impacts of direct land use change in semiarid woodlands converted to biofuel plantations in India and Brazil. *GCB Bioenergy* DOI: 10.1111/j.1757-1707.2011.01100.x (2011).
51. Šimůnek J, Šejna M and van Genuchten MTh, The HYDRUS-1D software package for simulating the one-dimensional movement of water, heat, and multiple solutes in variably-saturated media, Version 2.0, IGWMC - TPS - 70, International Ground Water Modeling Center, Colorado School of Mines, Golden, Colorado, pp 162 (1998).
52. Schaap MG, Leij, FJ and van Genuchten, MTh, Rosetta: a computer program for estimating soil hydraulic parameters with hierarchical pedotransfer functions. *J Hydrol* **251**:163–176 (2001).
53. Feddes RA, Kowalik PJ and Zaradny H, *Simulation of Field Water Use and Crop Yield*. John Wiley & Sons, New York, NY (1978).
54. Shah TJ and Burke KV, *Water for Food, Water for Life: A Comprehensive Assessment of Water Management in Agriculture*, ed by Molden, D. International Water Management Institute, Colombo (2007).
55. Berndes G, Bioenergy and water – the implications of large-scale bioenergy production for water use and supply. *Global Environ Chang* **12**:253–271 (2002).
56. Koh LP and Ghazoul J, Biofuels, biodiversity, and people: understanding the conflicts and finding opportunities. *Biol Conserv* **141**:2450–2460 (2008).
57. Tan RR, Foo DCY, Aviso KB and Ng DKS, The use of graphical pinch analysis for visualizing water footprint constraints in biofuel production. *Appl Energy* **86**:605–609 (2009).
58. Sharda VN, Dogra P and Prakash C, Assessment of production losses due to water erosion in rain-fed areas of India. *J Soil Water Conserv* **65**(2):79–91 (2010).
59. Walling DE, Global change and the sediment loads of the world's river. *Proceeding of the 10th International Symposium on River Sedimentation, Moscow, Russia*. August 1–4, 2007 (2007).
60. Yadav RK, Rupa Kumar K and Rajeevan M, Climate change scenarios for Northwest India winter season. *Quatern Int* **213**(1–2):12–19 (2010).
61. Pal I and Al-Tabbaa A, Trends in seasonal precipitation extremes – An indicator of 'climate change' in Kerala, India. *J Hydrol* **367**(1–2):62–69 (2009).
62. Mujumdar PP, Implications of climate change for sustainable water resources management in India. *Phys Chem Earth* **33**(5):354–358 (2008).
63. Batisani N and Yarnal B, Rainfall variability and trends in semi-arid Botswana: Implications for climate change adaptation policy *Appl Geog* **30**(4):483–489 (2010).
64. Zhang YG, Nearing MA, Zhang XC, Xie Y and Wei H, Projected rainfall erosivity changes under climate change from multimodel and multisenario projections in Northeast China, *J Hydrol* **384**(1–2):97–106 (2010).
65. Bürger CM, Kolditz O, Fowler HJ and Blenkinsop S, Future climate scenarios and rainfall-runoff modelling in the Upper Gallego catchment (Spain). *Environ Pollution* **148**(3):842–854 (2007).
66. Ward PJ, Van Balen, RT, Verstraeten, G, Renssen H and Vandenberghe J, The impact of land use and climate change on late Holocene and future suspended sediment yield of the Meuse catchment. *Geomorphology* **103**(3):389–400 (2009).
67. Zhu YM, Lu XX and Zhou Y, Sediment flux sensitivity to climate change: A case study in the Longchuanjiang catchment of the upper Yangtze River, China. *Global Planet Change* **60**(3–4):429–442 (2008).
68. Scholz G, Quinton JN and Strauss P, Soil erosion from sugar beet in Central Europe in response to climate change induced seasonal precipitation variations. *CATENA* **72**(1):91–105 (2008).
69. Nigel R and Rughooputh SDDV, Soil erosion risk mapping with new datasets: An improved identification and prioritisation of high erosion risk areas. *CATENA* **82**(3):191–205 (2010).
70. Lesschen JP, Kok K, Verburg PH, and Cammeraat LH, Identification of vulnerable areas for gully erosion under different scenarios of land abandonment in Southeast Spain. *CATENA* **71**(1):110–121 (2007).
71. Valentin C, Poesen J and Li Y, Gully erosion: Impacts, factors and control, *CATENA* **63**(2–3):132–153 (2005).
72. Yadav RC, Murthy JSR and Bhushan LS, Development of hydrologically optimal land formation practice for gully erosion susceptible ustifluent soil. *Agr Water Manage* **59**(2):113–135 (2003).
73. Hill J, Environmental costs and benefits of transportation biofuel production from food- and lignocellulose-based energy crops. A review. *Agron Sust Dev* **27**:1–12 (2007).
74. Giampietro M, Ulgiati S and Pimentel D, Feasibility of large-scale biofuel production: does an enlargement of scale change the picture? *Bioscience* **47**:587–600 (1997).
75. Giampietro M, Mayumi K and Ramos-Martin J, Can biofuels replace fossil energy fuels? A multi-scale integrated analysis based on the concept of societal and ecosystem metabolism: Part 1. *International Journal of Transdisciplinary Research* **1**:51–87 (2006).
76. Giampietro M and Mayumi K, *The Biofuel Delusion. The Fallacy of Large-scale Agrobiofuel Production*. Earthscan, London (2009).
77. Russi D, An integrated assessment of a large-scale biodiesel production in Italy: killing several birds with one stone? *Energy Pol* **36**:1169–1180 (2008).
78. Mitchell D, *A Note on Rising Food Prices*. Development Prospects Group, WorldBank, Policy Research Working Paper Number 4682 (July 2008).
79. Ewing M and Msangi S, Biofuels production in developing countries: assessing tradeoffs in welfare and food security. *Environ Sci Pol* **12**:520–528 (2009).
80. Montobbio PA and Lele S, Jatropha plantations for biodiesel in Tamil Nadu, India: Viability, livelihood trade-offs, and latent conflict. *Ecological Econ* **70**:189–195 (2010).
81. Rockström J, Water for food and nature in drought-prone tropics: Vapour shift in rain-fed agriculture. *Phil Trans R Soc B* **358**(1440):1997–2009 (2003).
82. Singh P, Aggarwal PK, Bhatia VS, Murty MVR, Pala M, Oweis T, Benli B, Rao KPC and Wani SP, Yield gap analysis: Modeling of achievable yields at farm level, in *Rain-fed agriculture: Unlocking the potential. The Comprehensive Assessment of Water Management in Agriculture series* ed by Wani SP, Rockstrom J and Oweis T. Volume 7, CABI Publishing, Wallingford, UK, pp 1–310 (2009).

83. Wani SP, Sreedevi TK, Rockstrom J, Ramakrishna YS, Rain-fed agriculture-Past trends and future prospects, in *Rain-fed agriculture: Unlocking the potential, The Comprehensive Assessment of Water Management in Agriculture Series* ed by Wani SP, Rockstrom J, Oweis T, Volume 7, CABI Publishing, Wallingford, UK, pp 1–310 (2009).
84. Ribeiro D and Matavel N, *Jatropha! A socio-economic pitfall for Mozambique*, Justica Ambiental (JA) and Uniao Nacional de Camponess (UNAC), Mozambique (2009).
85. Rug M, Sporer F, Wink M, Liu SY, Henning R and Ruppel A, Molluscicidal properties of *J. curcas* against vectorsnails of the human parasites *Schistosomamansonii* and *S. japonicum*, in *Biofuels and Industrial Products from Jatropha curcas*, Proceedings from the symposium *Jatropha 97*, ed by Gubitz GM, Mittelbach M and Trabi M, Managua, Nicaragua. Graz, Austria, Dbv-Verlag, pp 227–232 (1997).
86. Staubmann R, Foidl G, Foidl N, Gubitz GM, Lafferty RM, Valencia AVM, Production of biogas from *J. curcas* seeds press cake, in *Biofuels and Industrial Products from Jatropha curcas*, Proceedings from the symposium *Jatropha 97*, ed by Gubitz GM, Mittelbach M and Trabi MM, Nicaragua, Graz, Austria: Dbv-Verlag, pp 123–31, February 23–27 (1997).

**Kaushal K. Garg**

Dr Garg is working as a Visiting Scientist at ICRISAT. His specialization is in the area of hydrology and modeling of water cycles in semi-arid tropical situations. He holds an M.Tech and PhD in Agricultural Engineering from Indian Institute of Technology (IIT), Kharagpur, India.

**Louise Karlberg**

Dr Karlberg is a Research Fellow at Stockholm Environment Institute and also at Stockholm Resilience Centre. Her main areas of interest are water, carbon and nitrogen cycling in ecosystems. Projects include those dealing with water resources management in the tropical zone, as well as carbon sequestration in boreal ecosystems, employing a range of tools including both modeling and field measurements. She holds a PhD in Land and Water Resources Sciences from the Royal Institute of technology (KTH), Sweden.

**Suhas P. Wani**

Dr Wani is Principal Scientist (Watersheds) working in the rainfed areas under the semi-arid tropics for 32 years at ICRISAT. His main research areas are rainwater management, enhancing water use efficiency, bridging the yield gaps between the farmers' fields and the potential yields through farmer participatory integrated watershed management. He is leading number of watershed management projects in Asia.

**Göran Berndes**

Dr Berndes is Associate Professor at the Department of Energy and Environment at Chalmers University of Technology, Göteborg, Sweden. His work integrates land-use strategies and energy systems development in response to climate, energy and other policies put in place to guide the development. He is international leader of Task 43 (Biomass feedstocks for energy markets) in the Bioenergy implementing agreement of the IEA, and is also a member of several other international expert groups. He has an MSc in Engineering Physics and a PhD in Environmental Sciences and Physical Resource Theory.